

Choose how you would like to see your measurements:

Press **OK**.

Note that can be changed anytime. **Tool>Options**.

STEP
2

First Time Setup

You are running Digital Heat FX Print Optimizer for the first time. Please review initial settings and modify to suit your preferences.

Where applicable, all numeric values will be displayed using the selected units and number of decimal places set below.

Set display units: inches

Set number of decimal places: 2

To change these settings, and for advanced options, click on 'Tools->Options...' after the application begins.

OK

Printer Setup:

Click on **Install Printer**.

Create Queue Wizard

Printer Defaults

Assign a default printer for this production queue.

Select the default printer, print mode, and output port for this queue:


Printer: [Dropdown] Install Printer

Port: OKI DATA CORPPro8432WT_USB003+ [Dropdown] ...

Print mode: [Dropdown] ...


Back Next Cancel

Choose your **Printer Type**.

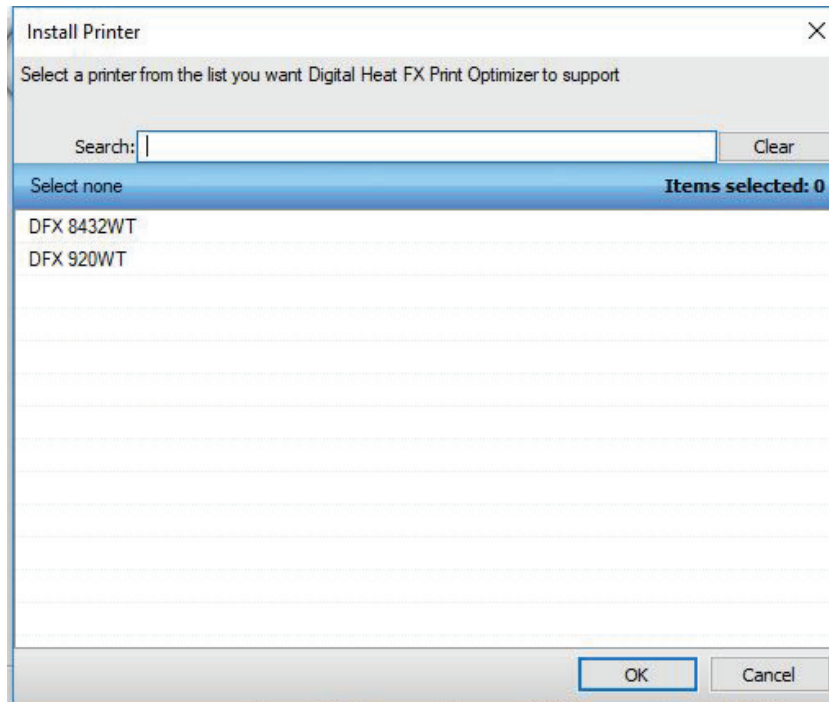


Select **Search for new printer package(s) from DVD or Cloud server** AND **Search Cloud Server**.

Press **Next**.

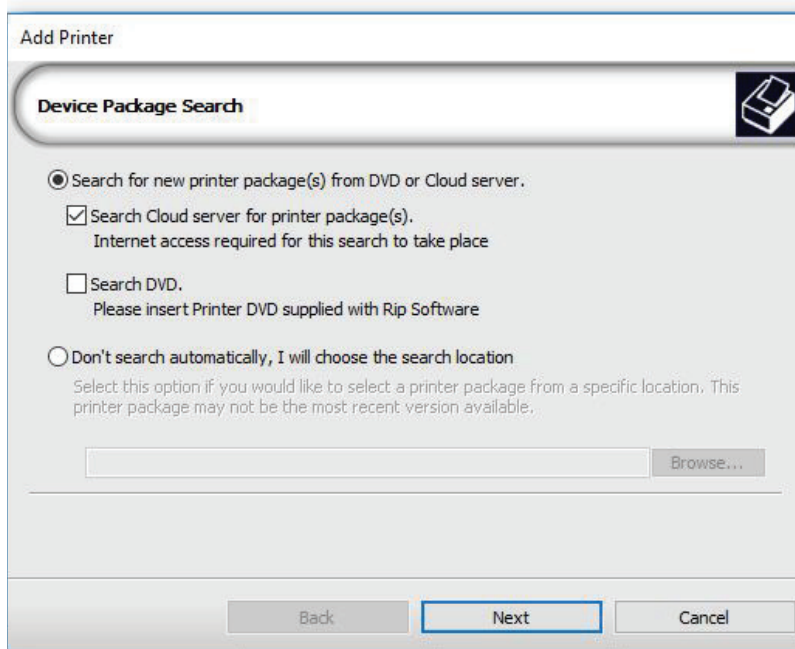

Program Package will now be downloaded and added to the **Optimizer**.

Press **Next**.

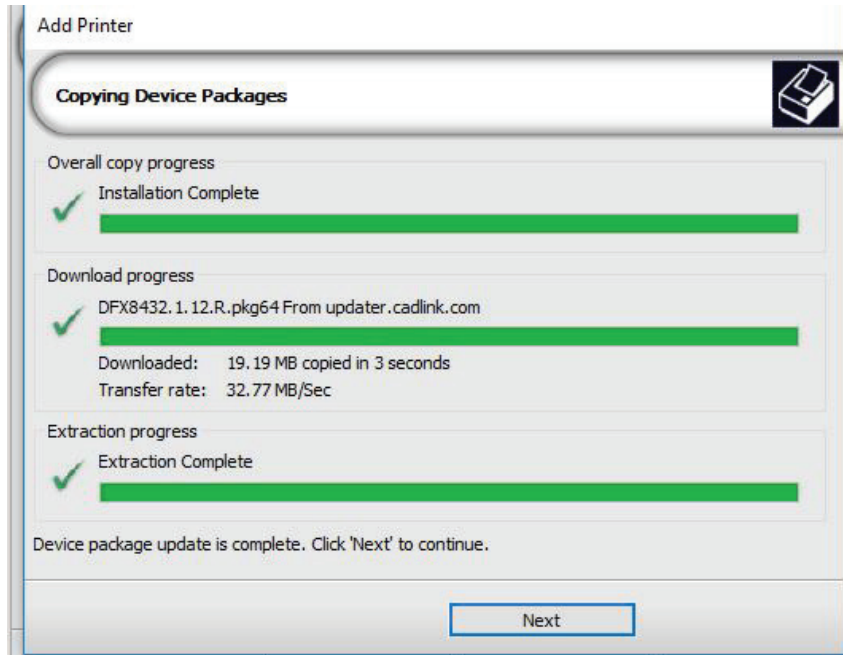

Packages installed and added successfully.

Press **Finish**.

